Industrial

### **Product Handling Information Sheet** Sustarin<sup>®</sup> C GLD 160 natural

1. Company			
Name/Address	Röchling Industrial Lahnstein SE & Co. KG		
	Sustaplast-Str. 1 • 56112 Lahnstein/Germany (DE) • Tel. +49 2621 693-0		
	info.lahnstein@roechling.com • www.roechling.com/industrial/lahnstein		
2. Product details			
Product/Article	Engineering semi-finished product		
Abbreviated terms	POM-C		
Material Characterisation	Thermoplastic		
Main Components	<ul> <li>polyacetal copolymer</li> <li>contains pTFE</li> <li>evtl. colour pigments</li> </ul>		
Components Subject to labelling	none		
Classification according to REACh	Article		
Notes			

3. Product characteristics		
Form/State	• solid	
Color	natural	
Odour	odourless	
Density	1,52	
Melting range	165	
Glass transition temperature		
Thermal decomposition	>240 °C	



## Röchling

Flash point	<u>-</u>		
Ignition temperature	>320 °C		
Notes			
Notes			
4. Danger warnings			
Special Risks For Mankind And T Environment	e none		
Notes	-		
5. Handling and Storage			
Handling	<ul> <li>Product can be worked with conventional machines and tools.</li> <li>Before machining the product should have room temperature and/or to be stored for min. 24h under normal climatic conditions.</li> </ul>		
Storage	<ul> <li>horizontally</li> <li>dry</li> <li>protected against climatic influences</li> </ul>		
Safety measures			
Shelf Life	-		
Notes	-		
6. Transport			
Transport	<ul> <li>Not classified as hazardous good under transport regulations.</li> </ul>		
Finished Product Packing			
Notes	-		



Print: 01/05/2024 • Release: 20/09/2023 • Version: 1.0 PIM-Version: 442 • PIM-ID: 591063 • PIM-Code: 442-29

# Röchling

Suitable extinguishing agents	• water	
	• foam	
	dry extinguishing media	
Potential combustion products	carbon monoxide	
	formaldehyde	
	<ul> <li>hydrogen fluoride – formation of further fission and oxidation products depend upon</li> </ul>	
	the fire conditions (traces of any other toxic substances can not be excluded)	
Necessary protection equipment	<ul> <li>Fire fighters and others exposed to combustion products should wear full protecti clothing and self-contained breathing apparatus.</li> </ul>	
Notes		
NOI85	Molten product should be cooled by water spray. Dispose fire debris and contaminated extinguishing water in accordance with local regulations.	

8. Removal				
Recyclability	Check possibility of recycling.			
EC Waste Catalog	According the European waste catalogue (EAK) the product is not classified as hazardous.			
Waste Removal	Waste disposal by landfill or incineration in compliance with state and local regulations.			
EC Waste Code	<ul><li>12 01 05 plastics shavings and turnings</li><li>07 02 13 waste plastic</li></ul>			
Notes				

9. Marking and Guidelines				
Marking in accordance with EE	C Guideline not subje	ct to labelling		
Notes				

10. Information about REACh	
Information about REACh	According to EC directive 1907/2006/EC (REACh), Article 3, no.3 our products are clearly defined as articles, exempt from registration. The EU regulation about chemicals no. 1907/2006 (REACh), which came into force 01 st of June 2007, prescribes Material Safety Data Sheets only for dangerous substances and preparations. According to REACh we are manufacturing articles and, therefore, not required to issue safety sheets

#### **11. Other Information**




Print: 01/05/2024 • Release: 20/09/2023 • Version: 1.0 PIM-Version: 442 • PIM-ID: 591063 • PIM-Code: 442-29



#### Industrial

Other Information

All above mentioned information are based on our current state of knowledge and ensure no warranty of quality. Existing laws and regulations have to be observed by the recepient of our products on his own authority.

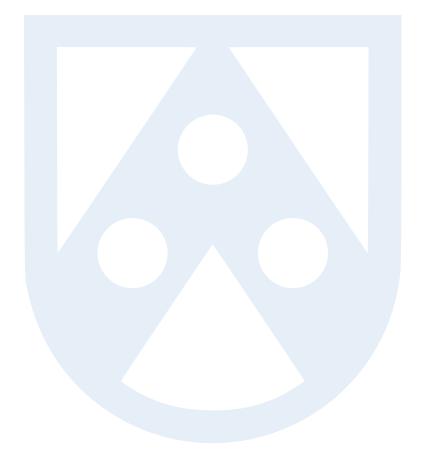



Print: 01/05/2024 • Release: 20/09/2023 • Version: 1.0 PIM-Version: 442 • PIM-ID: 591063 • PIM-Code: 442-29