

## Technical Data Sheet

# Sustarin<sup>®</sup> C ESD 60 - ASTM

POM-C

### Typical characteristics

- Electrically conductive
- UV-resistant
- Good resistance against many solvents

### Typical industries

- Mechanical Engineering Industry
- Conveyor Technology & Automation

	Test method	Unit	Guideline value
<b>General properties</b>			
Density	ASTM D792	g / cm <sup>3</sup>	1.44
Water Absorption	ASTM D570	%	1.0-2.0
Water Absorption 24 hours	ASTM D570	%	0.5
Dissipation Factor	ASTM D150	1MHz	0.005
<b>Mechanical properties</b>			
Hardness	ASTM D2240	Shore D	86
Tensile Strength at yield 73°F	ASTM D638	psi	11400
Tensile Modulus	ASTM D638	psi	425000
Elongation at Break	ASTM D638	%	5
Flexural Strength	ASTM D790	psi	16000
Flexural Modulus	ASTM D790	psi	1050000
Compressive Strength	ASTM D695	psi	15000
Rockwell Hardness	ASTM D785		86
Rockwell Hardness	ASTM D785	R	120
Shear Strength	ASTM D732	psi	8000
Izod Impact, Notched	ASTM D256	ft-lb/in	1.0
Coefficient of Friction, Dynamic			0.2
<b>Thermal properties</b>			
Thermal Conductivity		in/hr/ft <sup>2</sup> /°F	1.7
Coefficient of Linear Thermal Expansion	ASTM D696	in/in/°F x10 <sup>-5</sup>	4,4
Melting Point		°F	330

[ri-inquiry@roechling.com](mailto:ri-inquiry@roechling.com) • [www.roechling.com/industrial/materials](http://www.roechling.com/industrial/materials)

Print: 29/04/2026 • Release: 08/04/2024 • Version: 1.0

PIM-ID: 717930 • PIM-Code: 34-15-13.15.11-5.11-2


Company-IDs: 23070

Page 1 / 2 (Dates in DD/MM/YYYY)



	Test method	Unit	Guideline value
Continuous Service Temperature, Air		°F	200
Deflection Temperature at 1.8Mpa (264psi)	ASTM D648	°F	300
Flammability, UL94		1/8 inch	HB
<b>Electrical properties</b>			
Dielectric constant	ASTM D150	1MHz	3.7
Dielectric strength	ASTM D149	V/mil	400
Surface resistivity	ASTM D257	Ω/cm	10 <sup>4</sup>
<b>Compliance properties</b>			
FDA			No
NSF			No
USDA			No

The data stated above are average values ascertained by statistical tests on a regular basis. The data above are provided purely for information and shall not be regarded as binding unless expressly agreed in a contract of sale.

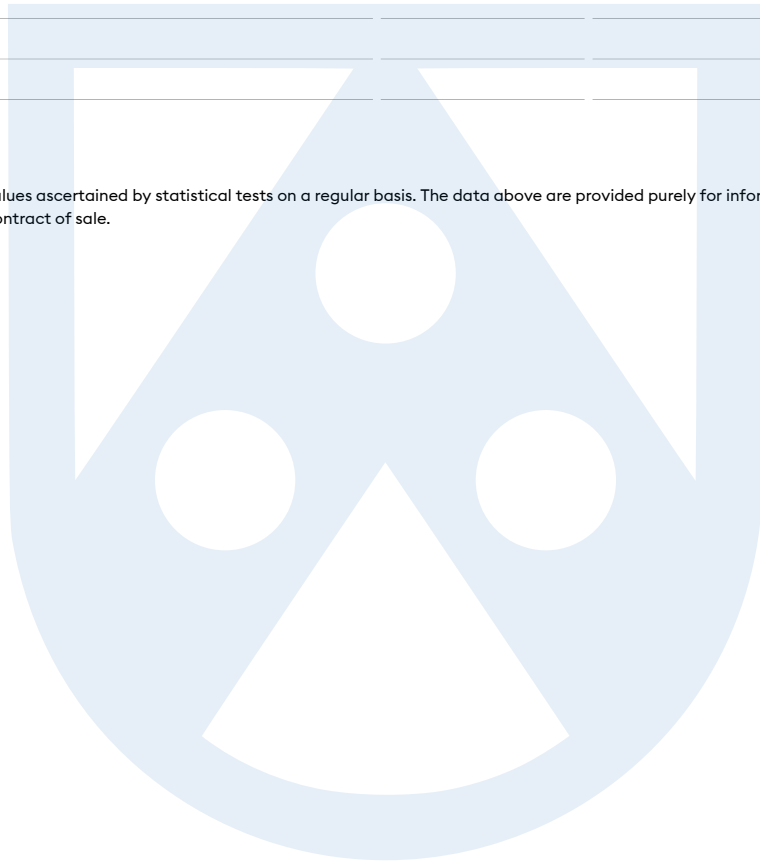

[ri-inquiry@roechling.com](mailto:ri-inquiry@roechling.com) • [www.roechling.com/industrial/materials](http://www.roechling.com/industrial/materials)

