

## EtroX® I CM

### The premium product for highly demanding applications


Our premium material EtroX® I CM was specially developed for the high demands of the electronics, aerospace and automotive industries. As a pure polyimide, it withstands particularly high temperatures. EtroX® I CM can be used to design components that have significant advantages over other thermoplastics.

#### Technical data

Properties	EtroX® I CM
Ball indentation hardness	235 MPa
Glass transition temperature	330 °C
Electrical strength	34 kV/mm
Dimensional stability temperature, 1.80 MPa	319 °C

#### Product range

Thickness : 4–85 mm
Format: 395 x 395 mm
Thickness : 8–40 mm
Format: 1,020 x 1,020 mm

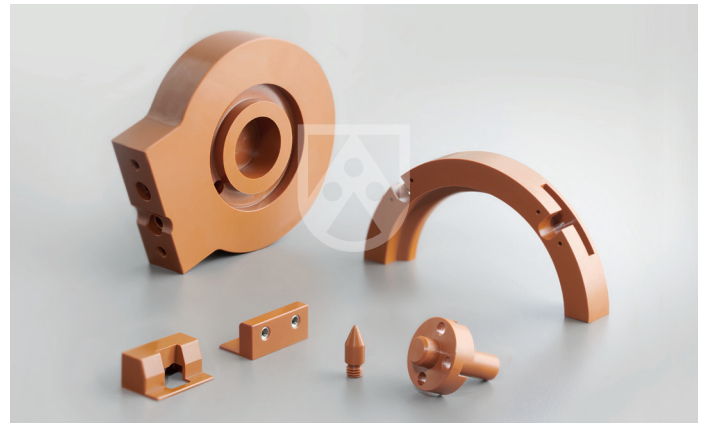


For applications with high requirements: components made of EtroX I CM are characterised by high temperature resistance, strength and impact resistance.

#### Industries


- Electronics industry
- Aerospace industry
- Automotive Industry
- Semiconductor Industry



Thrust washer for electric cars



Test socket for final chip testing



Grippers for glass bottles

### Properties



#### High mechanical strength

Even at high temperatures of more than 250 °C, EtroX® I CM has a high mechanical strength, so that the material can replace metals. High tensile strength, with adequate impact strength, stiffness and dimensional stability make it a premium material for demanding applications.



#### Easy processing

EtroX® I CM can be machined to tight tolerances using conventional CNC machines.



#### High temperature resistance

EtroX® I CM has a very high resistance even at high operating temperatures under load. In addition, the low inherent flammability enables applications with a high safety risk.



#### Long lifespan

Our material has a low wear rate so that components made of EtroX® I CM can be used for a long time and thus increase efficiency in the application.

For more information, please contact our product manager [Philip Rosenbaum | prosenbaum@roebling.com](mailto:prosenbaum@roebling.com)

**Röchling Industrial. Empowering Industry.**  
[www.roechling.com/industrial](http://www.roechling.com/industrial)

**Röchling Industrial Lahnstein SE & Co. KG**  
 Sustaplast-Str. 1 | 56112 Lahnstein | Germany | T +49 2621 693-0 | [info.lahnstein@roebling.com](mailto:info.lahnstein@roebling.com)

