

### Technical Data Sheet

## LubX<sup>®</sup> C white

PE-UHMW / PE 1000

#### Typical characteristics

- Energy-saving
- Especially aligned to POM and Steel
- Noise-reducing
- Coefficient of friction with POM as sliding partner up to 75% less than of PE-UHMW
- Coefficient of friction with steel as sliding partner up to 60% less than of PE-UHMW
- Food compliant according to 10/2011/EU, 1935/2004/EC, FDA

#### Typical industries

- Construction de machines et d'installations
- Systèmes de convoyage et automatisations
- Industrie agroalimentaire
- La transformation des viandes, des poissons, des volailles
- Produits de boulangerie et de confiserie
- Industrie des boissons


	Test method	Unit	Guideline value
<b>General properties</b>			
Densité	DIN EN ISO 1183-1	g / cm <sup>3</sup>	0,93
Water absorption	DIN EN ISO 62	%	<0,01
Flammability (Thickness 3 mm / 6 mm)	UL 94		HB
Non-toxicity			+
Moulding Compound PE	DIN ISO 1872-1		UHMW-PE-QCD 35-3-4
<b>Mechanical properties</b>			
Yield stress	DIN EN ISO 527	MPa	19
Elongation at break	DIN EN ISO 527	%	>50
Tensile modulus of elasticity	DIN EN ISO 527	MPa	>500
Notched impact strength	DIN EN ISO 179	kJ / m <sup>2</sup>	no break
Shore hardness	DIN EN ISO 868	scale D	60
Sliding partner POM MOD A (0,25 m/s - 0,25 MPa)	REP - Tribology - Test		0,08
Sliding partner POM MOD B (0,25 m/s - 0,25 MPa)	REP - Tribology - Test		0,11
<b>Thermal properties</b>			

[ri-inquiry@roechling.com](mailto:ri-inquiry@roechling.com) • [www.roechling.com/industrial/materials](http://www.roechling.com/industrial/materials)



	Test method	Unit	Guideline value
Melting temperature	ISO 11357-3	°C	133 - 135
Coefficient of linear thermal expansion	DIN 53752	10 <sup>-6</sup> / K	150 - 230 (*)
Service temperature, long term	Average	°C	-150 ... 80 (*)
Service temperature, short term (max.)	Average	°C	130 (*)
<b>Electrical properties</b>			
Volume resistivity	DIN EN 62631-3-1	Ω * cm	>10 <sup>15</sup>
Surface resistivity	DIN EN 62631-3-2	Ω	>10 <sup>14</sup>

The data stated above are average values ascertained by statistical tests on a regular basis. They are in accordance with DIN EN 15860. The data above are provided purely for information and shall not be regarded as binding unless expressly agreed in a contract of sale. (\*) literature values

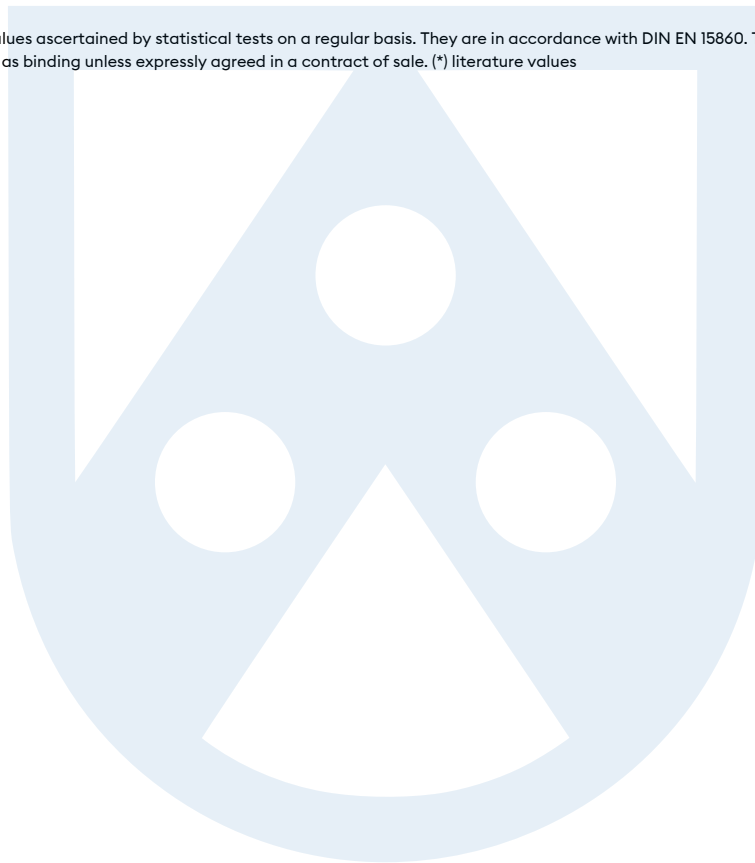

[ri-inquiry@roechling.com](mailto:ri-inquiry@roechling.com) • [www.roechling.com/industrial/materials](http://www.roechling.com/industrial/materials)

Print: 15/06/2026 • Release: 21/03/2025 • Version: 4.0  
 PIM-ID: 718600 • PIM-Code: 963-53-12.10.13.13.11.11-5.11.5.5.5.6-4  
 Company-IDs: 20000-1

Page 2 / 2 (Dates in DD/MM/YYYY)

