

## Technical Data Sheet

# Trovidur<sup>®</sup> ES FB

PVC-U

### Typical characteristics

- Fácil procesamiento, especialmente mediante costura o hilvanado, pero también mediante soldadura, termoconformado y encolado.
- Retardante de llama
- Autoextinguible tras retirar la llama.
- High breaking strength
- High bending strength
- RoHS
- Compatible con ELV
- Cumple con WEEE
- Compatible con RLAP
- Buena resistencia al impacto

### Typical industries

- Construcción de máquinas e instalaciones
- Tecnología de embutición profunda
- Autobuses

	Test method	Unit	Guideline value
<b>General properties</b>			
Density	DIN EN ISO 1183-1	g / cm <sup>3</sup>	1,41
Water absorption	DIN EN ISO 62	%	0,20
<b>Mechanical properties</b>			
Yield stress	DIN EN ISO 527	MPa	48
Elongation at break	DIN EN ISO 527	%	20
Tensile modulus of elasticity	DIN EN ISO 527	MPa	2500
Notched impact strength	DIN EN ISO 179	kJ / m <sup>2</sup>	8
Shore hardness	DIN EN ISO 868	scale D	77
Ball indentation hardness	DIN EN ISO 2039-1	MPa	100
<b>Thermal properties</b>			
Thermal conductivity	DIN EN ISO 8302	W / (m * K)	0,16
Vicat softening temperature	DIN EN ISO 306, Vicat B	°C	75

[ri-inquiry@roechling.com](mailto:ri-inquiry@roechling.com) • [www.roechling.com/industrial/materials](http://www.roechling.com/industrial/materials)


Print: 17/06/2026 • Release: 04/10/2023 • Version: 2.0  
 PIM-ID: 709780 • PIM-Code: 42-15-12.16.11.3.3.14.16.15.16.162-5.4.8-2  
 Company-IDs: 20000-2

Page 1 / 2 (Dates in DD/MM/YYYY)



	Test method	Unit	Guideline value
Service Temperature		°C	-20 ... +60
Heat deflection temperature	DIN EN ISO 75	°C	70
Coefficient of linear thermal expansion	DIN EN ISO 11359-2	mm/m K	~ 0,075
<b>Electrical properties</b>			
Dielectric constant	IEC 60250		3,2
Dielectric dissipation factor (10 <sup>6</sup> Hz)	IEC 60250		0,02
Volume resistivity	DIN EN 62631-3-1	Ω * cm	>10 <sup>15</sup>
Surface resistivity	DIN EN 62631-3-2	Ω	>10 <sup>13</sup>

The data stated above are average values ascertained by statistical tests on a regular basis. They are in accordance with DIN EN 15860. The data above are provided purely for information and shall not be regarded as binding unless expressly agreed in a contract of sale. Information on the REACH regulation can be found in our Product Handling Information Sheets, in our REACH information letter as well as in the SCIP database.

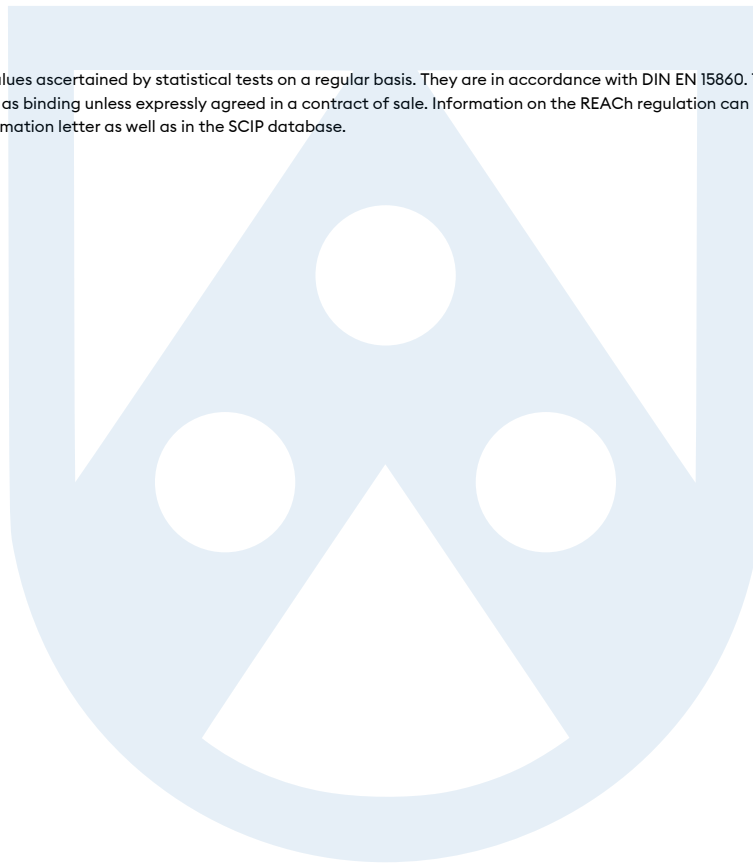

[ri-inquiry@roechling.com](mailto:ri-inquiry@roechling.com) • [www.roechling.com/industrial/materials](http://www.roechling.com/industrial/materials)

Print: 17/06/2026 • Release: 04/10/2023 • Version: 2.0  
 PIM-ID: 709780 • PIM-Code: 42-15-12.16.11.3.3.14.16.15.16.162-5.4.8-2  
 Company-IDs: 20000-2

Page 2 / 2 (Dates in DD/MM/YYYY)

